



Unique and Smart Closure for FTTH Access

A scalable concept makes it easier to adapt the product to your needs






APPLICATION

- FTTx access networks
- Facade, aerial, manhole, direct burial installation

TECHNICAL CHARACTERISTICS

- Removable core
- Dimensions 200 x 250 x 75 mm
- Up to 144 splice (6 tray packs)
- 8 or 16 outbound ports (with splitting port kits)
- 4 or 8 inbound ports (with splitting port kits)
- Fiber management for feeder cable and user cable
- IP68 @ 1 m CEI EN 60529
- IK10 CEI EN 50102
- Operating temperature -40°C / +70°C
- UL94-V0
- Fixing kit included
- Colour gray 7035 for aerial installation
- Colour black 9005 for manhole installation

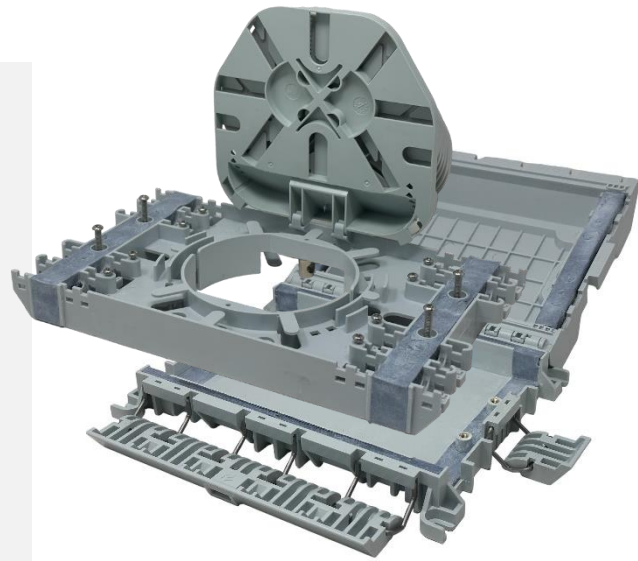

TRAY PACKS

H-OFST-R-12MICRO

Fiber splice tray pack for 144 micro smooov



H-OFST-R-24STD

Fiber splice tray pack for 72 standard smooov



H-OFST-R-12STD

Fiber splice tray pack for 72 standard smooov



H-OFST-R-HY01

Fiber splice tray pack for PLC splitter



H-OFST-R-PLC

Fiber Splice Tray Pack for 48 standard smov and PLC

